

Touch Series

Model: Touch V2



| | | | |
|--|-----------------|------------------------------------|----------------------------|
| Set Temperature Range | 5-35°C, 41-95°F | Frost Protection (7°C - 17°C) | Y |
| Cool White Back Lit Screen | Y | Daylight Saving Time (DST) | Y |
| Non-Programmable Mode | Y | °C / °F Option | Y |
| 5/2 Day Programming Mode | Y | Built In Air Sensor | Y |
| 7 Day Programming Mode | Y | Remote Air Sensing Mode (Wireless) | Y |
| 24 Hour Mode | Y | Floor Sensing Mode (Wired) | Y |
| Number of Heating Levels | 4 or 6 | Remote Probe Included | N |
| Advance Function | Y | Floor Temp Limit Protection | Y |
| Optimum Start | Y | Cooling | N |
| Number of Switching Times (Timer mode) | 4 | Max Switching Current | 3A |
| Holiday Function | Y | Modbus (Maximum 32 devices) | Y |
| Keylock Function | Y | Accuracy +/- | 1°C |
| Temperature Hold Function | Y | Adjustable Switching Differential | 0.5°C - 3°C |
| Temperature Override | Y | Supply | 230V AC |
| Temperature Override Limit | Y | Installed Dimensions | 107x86x15mm (L,H,D) |
| Output Delay | Y | Weight | 199g |

Feature Table - Thermostat Mode


| FEATURE | DESCRIPTION | SETTING |
|---------|---------------------------|--|
| A | Viewing Accessory | Information only |
| P | Pairing Accessories | Commences countdown from 99 - 00 seconds. |
| 01 | Temperature Format | 00 = 0.5°C 01 = 1.0°C (Default) 02 = 2.0°C 03 = 3.0°C |
| 02 | Switching Differential | 00 = 0.5°C, 01 = 1.0°C (Default) 02 = 2.0°C, 03 = 3.0°C |
| 03 | Output Delay | 00 - 15 Minutes (00 = Default) |
| 04 | Up/Down Temperature Limit | 00° - 10°C (00° = Default) |
| 05 | Sensor Selection | 00 = Built in Sensor with optional wireless Remote Air (Default) 01 = Wireless Remote Air Only 02 = Floor Sensor Only 03 = Built in + Floor Sensor + optional wireless Remote Air 04 = Floor Sensor + Wireless Remote Air Only |
| 06 | Floor Temperature Limit | 20°C - 45°C (28°C Default) |

| FEATURE | DESCRIPTION | SETTING |
|---------|----------------------------|--|
| 07 | Optimum Start | 00 = Disabled (Default) 01 = 1 Hour 02 = 2 Hours 03 = 3 Hours 04 = 4 Hours 05 = 5 Hours |
| 08 | Rate of Change | Minutes to raise by 1°C |
| 09 | Program Mode | 00 = Weekday/Weekend (Default), 01 = 7 Day, 02 = 24 Hour Mode, 03 = Non-Programmable, |
| 10 | (DST) Daylight Saving | 00 = Disabled (Default) 01 = Enabled |
| 11 | Communications ID (Modbus) | 01-32, 00 = Disabled |
| 12 | Program Type | 00 = 4 Comfort Levels (Default) 01 = 6 Comfort Levels |

Feature Table - Timer Mode

| | | |
|----|----------------------------|--|
| 01 | Program Mode | 00 = Weekday/Weekend (Default), 01 = 7 Day, 02 = 24 Hour Mode |
| 02 | Daylight Saving Time (DST) | 00 = Disabled (Default) 01 = Enabled |
| 03 | Communications ID (Modbus) | 01-32, 00 = Disabled |

Product Dimensions (mm) & Wiring Specification

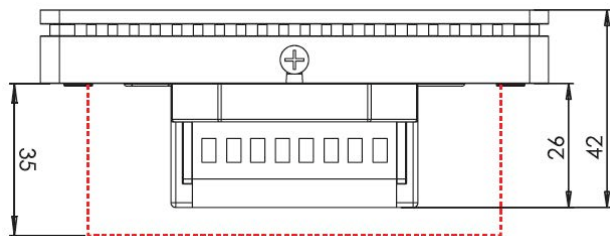

Note: Fits standard 35mm depth back box

